

NVR202-09/16-IN

Key Features


- Third-party IP cameras supported with ONVIF conformance
- Direct-to-iSCSI data block storage, accurate retrieval, instant playback
- 4-ch sync playback
- HDMI, VGA output up to 1080p
- 2 SATA HDDs up to 8TB
- JBOD, RAID1
- Fanless design

Specifications


	NVR202-09-IN	NVR202-16-IN
Video		
IP Video Input	9-ch	16-ch
CVBS Output	1-ch, BNC (1.0Vp-p, 75Ω)	
VGA Output	1-ch, resolution: 1920*1080@60,1280*720@60,1280*1024@60,1024*768@60,1600*1200@60	
HDMI Output	1-ch, resolution: 1920*1080@60,1280*720@60,1280*1024@60,1024*768@60,1600*1200@60	
Recording Resolution	1080P / 720P / D1 / 2CIF / CIF	
Sync Playback	4-ch	
Audio		
Output	1-ch, BNC	
Two-way Talk	1-ch Input, 1-ch Output (Reuse the audio output channel), BNC	
Storage		
HDD	2 SATA interfaces	
Capacity	Up to 4TB capacity for each HDD	
External Interface		
Network Interface	1 RJ45 10M/100M/1000M adaptive Ethernet Interface	
USB Interface	2 USB2.0 interfaces	
Serial Interface	1 RS-232 / RS-485 interface, RJ45	
Alarm I/O	4/2	8/4
General		
Power Supply	12 VDC, 5 A	
Consumption	8W (Without Disk) 25W (Fully Configured)	
Working Environment	-10°C to 55°C (10 °F to 131 °F) 10% to 90% RH	
Weight	Empty<2.5kg (5.5lb)	

	Fully Configured < 4kg (8.8lb)
Dimensions (H×W×D)	43.6mm × 298.3mm × 360.0mm (1.72" × 11.74" × 14.17")

Dimensions

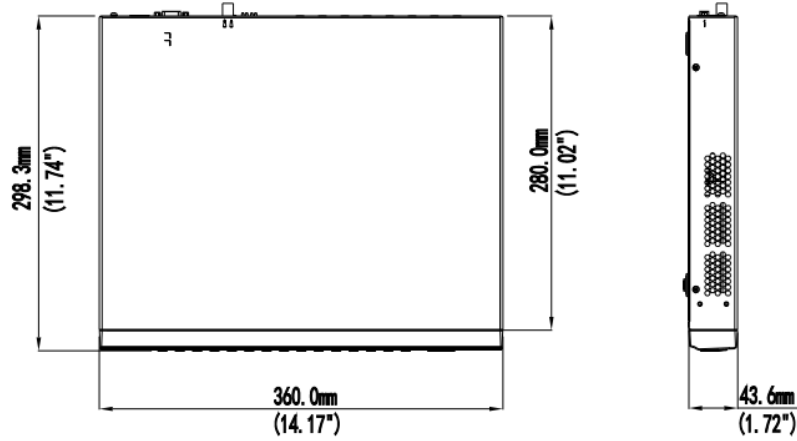

Rear Panel

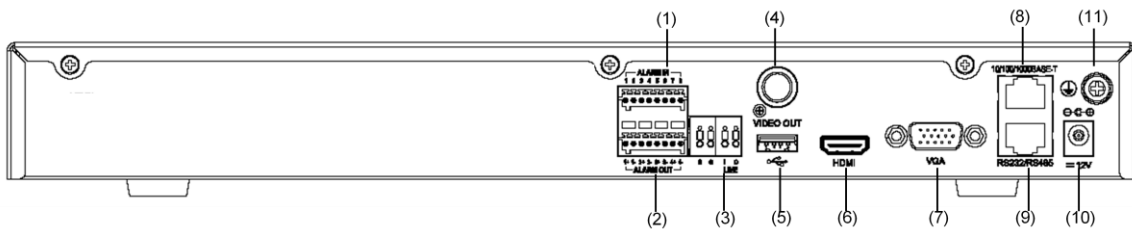

NVR202-16-IN

(1) Alarm Input	(2) Alarm Output	(3) Two-way Talk
(4) CVBS Output	(5) USB	(6) HDMI Output
(7) VGA Output	(8) Network Interface	(9) RS-232/RS-485
(10) Power outlet	(11) GND	

*Take NVR202-16-IN as an example

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2014 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.