

NVR308-16/32-IN

Key Features


- Third-party IP cameras supported with ONVIF conformance
- Direct-to-iSCSI data block storage, accurate retrieval, instant playback
- 8/16-ch sync playback
- DVI-D, VGA output up to 1080p
- Triple-display output
- 8 SATA HDDs up to 32TB
- Hot-swappable HDDs
- JBOD, RAID1, RAID5
- Hot spare disk for RAID5

Specifications


	NVR308-16-IN	NVR308-32-IN
Video		
IP Video Input	16-ch	32-ch
CVBS Output	1-ch, BNC (1.0Vp-p, 75Ω)	
VGA Output	1-ch, resolution: 1920*1080@60,1280*720@60,1280*1024@60,1024*768@60,1600*1200@60	
DVI-D Output	1-ch, resolution: 1920*1080@60,1280*720@60,1280*1024@60,1024*768@60,1600*1200@60	
Recording Resolution	1080P/720P/D1/2CIF/CIF	
Sync Playback	8-ch	16-ch
Audio		
Output	1-ch, BNC	
Two-way Talk	1-ch Input, 1-ch Output (Reuse the audio output channel), BNC	
Storage		
HDD	8 SATA interfaces	
Capacity	Up to 4TB capacity for each HDD	
External Interface		
Network Interface	1 RJ45 10M/100M/1000M adaptive Ethernet Interface	
USB Interface	2 USB2.0 interfaces	
Serial Interface	1 RS-232 , 2 RS-485	
Alarm I/O	16/4	
Power Output	12 VDC, 12 W (MAX)	
General		
Power Supply	100 ~ 240 VAC	

Consumption	25W (Without Disk) 95W (Fully Configured)
Working Environment	-10°C to 55°C(10 °F to 131 °F) 10% to 90% RH
Weight	Empty<9kg (19.8lb) Fully Configured<14.5kg (32.0lb)
Dimensions (H×W×D)	86.1mm × 442.0mm × 534.3mm (3.39"× 17.40"× 21.04")

Dimensions

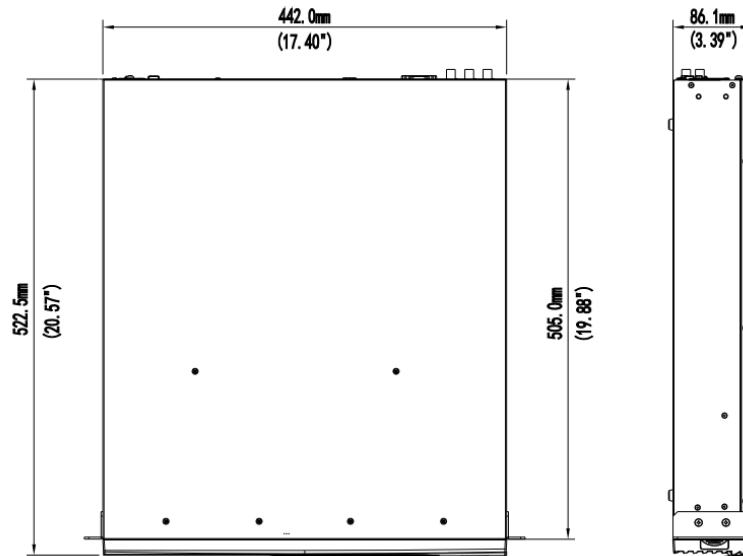

Rear Panel

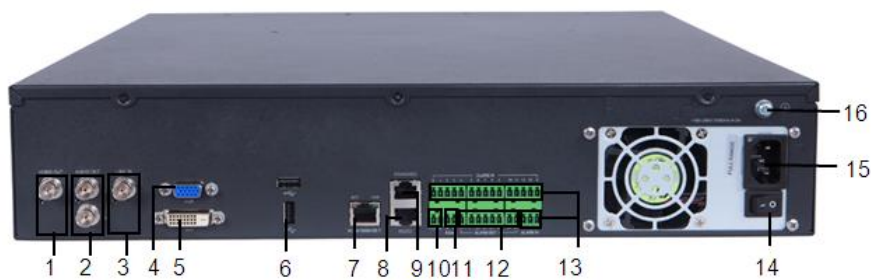

NVR308-32-IN

(1) CVBS Output	(2) Audio Output	(3) Two-way Talk
(4) VGA Output	(5) DVI-D Output	(6) USB
(7) Network Interface	(8) RS-232	(9) RS-485

(10) Power Output	(11) RS-485	(12) Alarm Output
(13) Alarm Input	(14) Power Switch	(15) Power Outlet
(16) GND		

*Take NVR308-32-IN as an example

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2014 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.