

# NVR308-24/48-IN

## Key Features


- Third-party IP cameras supported with ONVIF conformance
- Direct-to-iSCSI data block storage, accurate retrieval, instant playback
- 8/16-ch sync playback
- DVI-D, VGA output up to 1080p
- Triple-display output
- 8 SATA HDDs up to 32TB
- Hot-swappable HDDs
- JBOD, RAID1, RAID5
- Hot spare disk for RAID5

## Specifications

	DVR308-24-IN	DVR308-48-IN
<b>Video</b>		
IP Video Input	24-ch	48-ch
CVBS Output	1-ch, BNC (1.0Vp-p, 75Ω)	
VGA Output	1-ch, resolution: 1920*1080@60,1280*720@60,1280*1024@60,1024*768@60,1600*1200@60	
DVI-D Output	1-ch, resolution: 1920*1080@60,1280*720@60,1280*1024@60,1024*768@60,1600*1200@60	
Recording Resolution	1080P/720P/D1/2CIF/CIF	
Sync Playback	8-ch	16-ch
<b>Audio</b>		
Output	2-ch, BNC	
Two-way Talk	1-ch Input, 1-ch Output (Reuse the audio output channel), BNC	
<b>Storage</b>		
HDD	8 SATA interfaces	
Capacity	Up to 4TB capacity for each HDD	
<b>External Interface</b>		
Network Interface	1 RJ45 10M/100M/1000M adaptive Ethernet Interface, 1 1000M Base-FX SFP Interface	
USB Interface	2 USB2.0 interfaces	
Serial Interface	1 RS-232 , 2 RS-485	
Alarm I/O	16/4	
Power Output	12 VDC, 12 W (MAX)	
eSATA Interface	1 eSATA	

General	
Power Supply	100 ~ 240 VAC
Consumption	25W (Without Disk) 95W (Fully Configured)
Working Environment	-10°C to 55°C(10 °F to 131 °F) 10% to 90% RH
Weight	Empty<9kg (19.8lb) Fully Configured<14.5kg (32.0lb)
Dimensions (H×W×D)	86.1mm × 442.0mm × 534.3mm (3.39"× 17.40"× 21.04")

## Dimensions

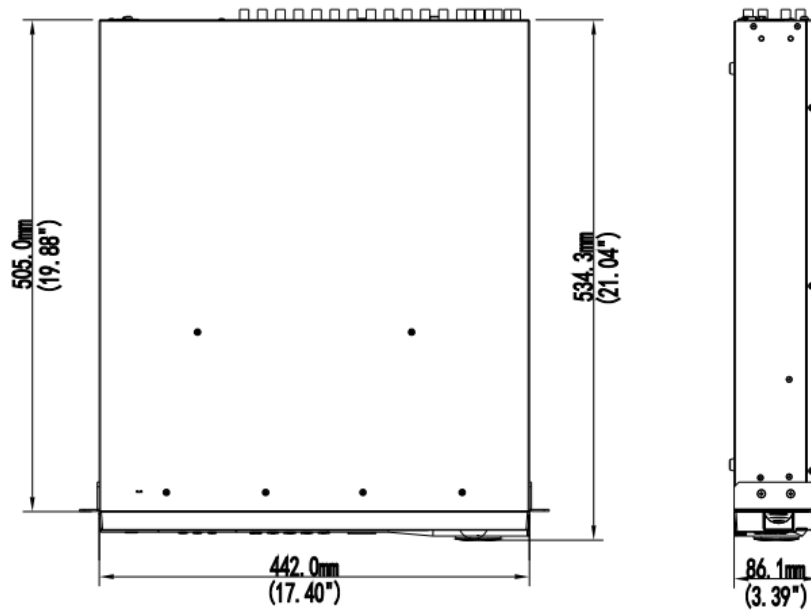

## Rear Panel



NVR308-24-IN

(1) CVBS Output	(2) Audio Output	(3) Two-way Talk
(4) VGA Output	(5) DVI-D Output	(6) eSATA
(7) USB	(8) SFP Interface	(9) Network Interface
(10) RS-232	(11) RS-485	(12) Power Output
(13) RS-485	(14) Alarm Output	(15) Alarm Input
(16) Power Switch	(17) Power Outlet	(18) GND

\*Take NVR308-24-IN as an example

**Zhejiang Uniview Technologies Co., Ltd.**

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2014 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.