

NVR308-09/16/32L-IN

Key Features


- Third-party IP cameras supported with ONVIF conformance
- Direct-to-iSCSI data block storage, accurate retrieval, instant playback
- 9/16/16-ch sync playback
- HDMI, VGA output up to 1080p
- 8 SATA HDDs up to 32TB

Specifications


	NVR308-09L-IN	NVR308-16L-IN	NVR308-32L-IN
Video			
IP Video Input	9-ch	16-ch	32-ch
CVBS Output	1-ch, BNC (1.0Vp-p, 75Ω)		
VGA Output	1-ch, resolution: 1920*1080@60,1280*720@60,1280*1024@60,1024*768@60,1600*1200@60		
HDMI Output	1-ch, resolution: 1920*1080@60,1280*720@60,1280*1024@60,1024*768@60,1600*1200@60		
Recording Resolution	1080P/720P/ D1/2CIF/CIF		
Sync Playback	9-ch	16-ch	16-ch
Audio			
Output	1-ch, BNC		
Two-way Talk	1-ch Input, 1-ch Output (Reuse the audio output channel), BNC		
Storage			
HDD	8 SATA interfaces		
Capacity	Up to 4TB capacity for each HDD		
External Interface			
Network Interface	2 RJ45 10M/100M/1000M adaptive Ethernet Interface		
USB Interface	4 USB2.0 interfaces		
Serial Interface	1 RS-232 / RS-485 , 1 RS-485		
Alarm I/O	16/4		
Power Output	12 VDC, 12 W (MAX)		
eSATA	1 eSATA		
General			
Power Supply	100 ~ 240 VAC		
Consumption	20W (Without Disk) 90W (Fully Configured)		
Working Environment	-10°C to 55°C(10 °F to 131 °F) 10% to 90% RH		
Weight	Empty<5.5kg (12.1lb)		

	Fully Configured <11kg (24.3)
Dimensions (H×W×D)	86.1mm × 442.0mm × 425.5mm (3.39" × 17.40" × 16.75")

Dimensions

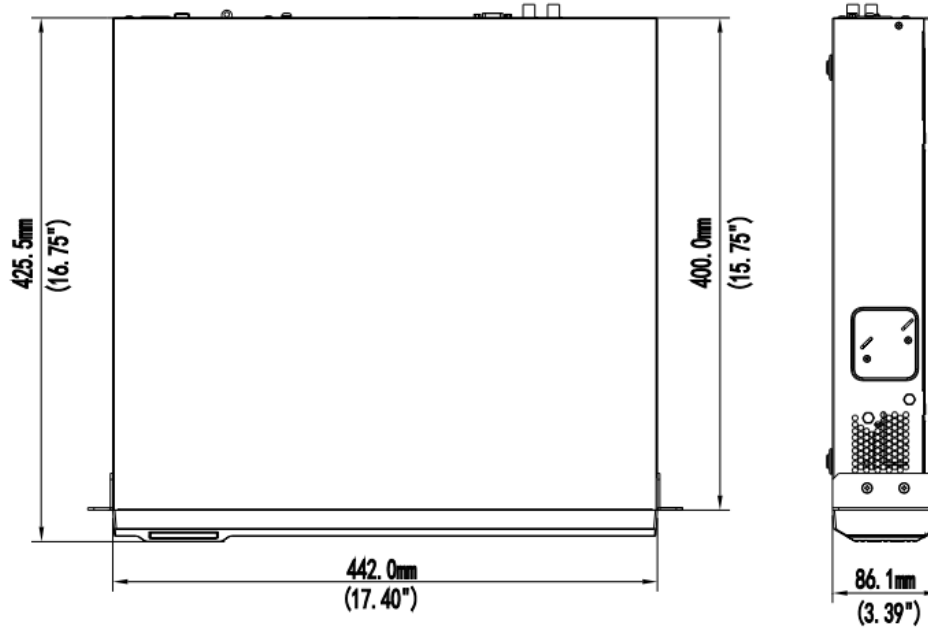

Rear Panel

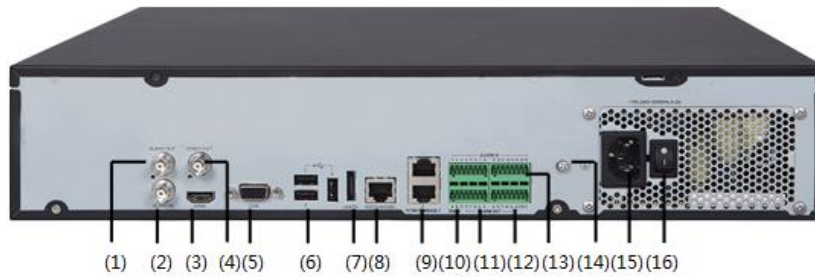

NVR308-32L-IN

(1) Audio Output	(2) Two-way Talk	(3) HDMI Output
(4) CVBS Output	(5) VGA Output	(6) USB
(7) eSATA	(8) RS-232/ RS-485	(9) Network Interface
(10) RS-485	(11) Alarm Output	(12) Power Output
(13) Alarm Input	(14) GND	(15) Power Outlet
(16) Power Switch		

*Take NVR308-32L-IN as an example

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2014 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.